

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
KN-43-US

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

COMPACT IMAGE SCANNER CAPABLE OF READING BOTH A LIGHT-REFLECTING ARTICLE AND A LIGHT-TRANSMITTING ARTICLE

and invented by:

Hisao Hayashi

JC584 U.S. PTO
09/492521
01/27/00

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 44 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
KN-43-US

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 8 (Figs. 1-9)
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail *(Specify Label No.):* _____

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
KN-43-US

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*


16. ☐ Additional Enclosures *(please identify below):*

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	20	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	4	- 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$768.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
 - ☐ Credit any overpayment.
 - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Sean M. McGinn, Esq.
Registration No. 34,386

Dated: January 27, 2000

cc:

Customer No. 21254

MCGINN & GIBB, P.C.
A PROFESSIONAL LIMITED LIABILITY COMPANY
PATENTS, TRADEMARKS, COPYRIGHTS, AND INTELLECTUAL PROPERTY LAW
1701 CLARENDON BOULEVARD, SUITE 100
ARLINGTON, VIRGINIA 22209
TELEPHONE (703) 294-6699
FACSIMILE (703) 294-6696

**APPLICATION
FOR
UNITED STATES
LETTERS PATENT**

APPLICANT: Hisao Hayashi

FOR: COMPACT IMAGE SCANNER
CAPABLE OF READING BOTH A
LIGHT-REFLECTING ARTICLE AND
A LIGHT-TRANSMITTING ARTICLE

DOCKET NO.: KN-43-US

00/270-72926460

COMPACT IMAGE SCANNER CAPABLE OF READING BOTH A
LIGHT-REFLECTING ARTICLE AND A LIGHT-
TRANSMITTING ARTICLE

5 Background of the Invention:

This invention relates to an image scanner,
particularly to an image scanner for use in reading an image of
a sheet-like medium, such as a manuscript and a film.

It is a recent trend that a personal computer of
10 high performance can be provided at a low cost. This trend
makes image information processing be very popular and
increases chance to deal with various image information for
everyone. Under the circumstances, it is frequent that
various informations including a manuscript are inputted into
15 such a personal computer. With such a change of the
circumstances, information are converted into electronic
information to construct a filing system consisting of
integrated information, even if the information were recorded
in a paper, a photo film, or OHP (Over Head Projector) paper
20 that has been conventionally used as a recording medium of
information. Further, an Internet comes to be in common use
with developments of computers or communication technology.
As a result, image information has been used considerably
even in a field of home page or electronic mail.

25 As a way of inputting such various image
informations, an image scanner is used to read the image.
Conventionally, image scanners are mainly classified into
either reflection type image scanners or transmission type

09492531.012700

image scanners. The reflection type image scanners, which are represented by a flat bed scanner and a sheet feed scanner, read, for example, a photo printed in , a magazine, a newspaper, a printed article printed and outputted by a printer, a hand-written manuscript, and the like by a reflection light. On the other hand, the transmission type image scanners, which are represented by a film scanner to read a film such as 35 mm film, and the like, read an image recorded in a transmission manuscript such as a positive film, a negative film, and the like.

The reflection type image scanners read a manuscript by the use of a light reflected by the manuscript while the transmission type image scanners read a manuscript by the use of a light transmitted through the manuscript. In the former, namely the reflection type image scanners, the light reflected by the manuscript is to be incident into an image sensor. It is therefore necessary that both the image sensor and a light source should be positioned at one side of the manuscript commonly to each other. On the other hand, in the latter, namely the transmission type image scanners, the light transmitted through the manuscript is to be incident into an image sensor. It is therefore necessary that the manuscript should be located between a light source and the image sensor. By difference of structure thus mentioned, conventionally, these two types of image scanners are sold and used as articles different from each other.

In the interim, as described above, chance of inputting an image by an image scanner is increased.

0049254-012700

Further, it comes to be popularized that reading of image by using image scanners are carried out even in a comparatively small office and a family. However, from the viewpoints of a space for locating the image scanner and the purchase price, it is still difficult for users to acquire both the reflection type and the transmission type image scanners separately. Consequently, it is strongly desired that an image scanner having functions of both the reflection type and the transmission type image scanners is provided to users. Some proposals are made to provide such an image scanner having functions of both the reflection type and the transmission type image scanners. For example, image scanners having the both functions thereof are exemplified in unexamined Japanese Patent Publications, Hei8-88736, namely 88736/1996, and Hei4-157964, namely 157964/1992, respectively. Further, an image scanner similarly having the both functions thereof is exemplified in examined Japanese Patent Publication, Hei5-76222, namely 76222/1993. However, the image scanners disclosed in these examples have, to be sure, functions of both the reflection type and the transmission type image scanners. It is inevitably caused to occur that the image scanners become large in size.

Summary of the Invention:

It is therefore an object of the present invention to provide an image scanner which is capable of reading both a light-reflecting manuscript and a light-transmitting manuscript and which can be compact in size.

Other objects of this invention will become clear as

00492321.012700

the description proceeds.

According to an aspect of this invention, there is provided an image scanner for use in reading image information, comprising:

- 5 conveying means for conveying a manuscript including said image information to be read on a predetermined reading position of a conveying route;

10 a first light source which is located at one side of said conveying route and which emits light onto said predetermined reading position from said one side;

 a second light source which is located at another side of said conveying route with being opposite to said first light source and which emits light onto said predetermined reading position from said another side opposite to said one side;

- 15 image information reading means for reading said image information included in said manuscript at said predetermined reading position on said conveying route by light-electricity conversion; and

20 light source switching control means for controlling light source switching between said first and said second light sources to read said image information included in said manuscript, said light source switching control means rendering only said first light source ON when said image information is defined by a transmitting light transmitting
25 through said manuscript, said light source switching control means rendering only said second light source ON when said image information is defined by a reflected light reflected by said manuscript.

00492524.012700

According to another aspect of this invention, there is provided an image scanner for use in reading image information, comprising:

a driving side conveying roll for conveying a manuscript
5 including said image information to be read;

a driven side conveying roll which is located above said driving side conveying roll and which rotates by rolling-contact with said driving side conveying roll;

a manuscript sensor for detecting said manuscript when
10 a head of said manuscript arrives at a position near the rolling-contact position between said driving side conveying roll and said driven side conveying roll;

conveying roll driving means for starting a rotation of said driving side conveying roll when said manuscript sensor
15 has detected an arrival of said head of said manuscript;

light-electricity conversion means for carrying out light-electricity conversion of said image information per one line in a main-scanning direction of said manuscript from a side of one surface of said manuscript at a reading position on
20 a conveying route when said driving side conveying roll is started to rotate by said conveying roll driving means and said manuscript is thereby started to move toward the sub-scanning direction between said driving side and said driven side conveying rolls, said reading position existing
25 downstream of said conveying route from the rolling-contact position by a predetermined distance;

a first light source for emitting light onto said reading position from a side of another surface of said manuscript

002201252460

opposite to said one surface thereof;

a second light source for emitting light onto said reading position from a side of the same surface of said manuscript as said one surface thereof; and

- 5 light source switching control means for selectively rendering either said first light source or said second light source ON to read said image information included in said manuscript, dependent on whether said image information is defined by a reflected light reflected by said manuscript or by
10 a transmitting light transmitting through said manuscript.

According to yet another aspect of this invention, there is provided an image scanner for use in reading image information, comprising:

- a driving side conveying roll for conveying a manuscript
15 including said image information to be read;

a driven side conveying roll which is located above said driving side conveying roll and which rotates by rolling-contact with said driving side conveying roll;

- a manuscript sensor for detecting said manuscript when
20 a head of said manuscript arrives at a position near the rolling-contact position between said driving side conveying roll and said driven side conveying roll;

- conveying roll driving means for starting a rotation of said driving side conveying roll when said manuscript sensor
25 has detected an arrival of said head of said manuscript;

light-electricity conversion means for carrying out light-electricity conversion of said image information per one line in a main-scanning direction of said manuscript from a

00221012700

side of one surface of said manuscript at a reading position on a conveying route when said driving side conveying roll is started to rotate by said conveying roll driving means and said manuscript is thereby started to move toward the sub-
 5 scanning direction between said driving side and said driven side conveying rolls, said reading position existing downstream of said conveying route from the rolling-contact position by a predetermined distance;

a first light source for emitting light onto said reading
 10 position from a side of another surface of said manuscript opposite to said one surface thereof;

a second light source for emitting light onto said reading position from a side of the same surface of said manuscript as said one surface thereof; and

15 light source selection input means for inputting whether either said first light source or said second light source should be selected, dependent on whether said image information is defined by a reflected light reflected by said manuscript or by a transmitting light transmitting through said manuscript,
 20 and

light source switching control means for selectively rendering either said first light source or said second light source ON to read said image information included in said manuscript, responsive to a result of selection by said light
 25 source selection input means.

According to still another aspect of this invention, there is provided an image scanner for use in reading image information, comprising:

0022521.012700

a driven side conveying roll which is located above said driving side conveying roll and which rotates by rolling-contact with said driving side conveying roll;

10 conveying roll driving means for starting a rotation of
said driving side conveying roll when said manuscript sensor
has detected an arrival of said head of said manuscript;

light-electricity conversion means for carrying out light-electricity conversion of said image information per one line in a main-scanning direction of said manuscript from a side of one surface of said manuscript at a reading position on a conveying route when said driving side conveying roll is started to rotate by said conveying roll driving means and said manuscript is thereby started to move toward the sub-scanning direction between said driving side and said driven side conveying rolls, said reading position existing downstream of said conveying route from the rolling-contact position by a predetermined distance;

a first light source for emitting light onto said reading
25 position from a side of another surface of said manuscript
opposite to said one surface thereof;

a second light source for emitting light onto said reading position from a side of the same surface of said manuscript as

said one surface thereof; and

manuscript type judging means which respectively renders said first and said second light sources exclusively ON on a condition that said manuscript is existing at said reading
 5 position to compare respective signal levels after conversion by said light-electricity conversion means, and which thereby judge whether said manuscript is such a type of manuscript as read by a transmitting light transmitting through said manuscript or such an another type of manuscript as read by a
 10 reflected light reflected by said manuscript; and

light source switching control means for selectively rendering either said first light source or said second light source ON to read said image information included in said manuscript, responsive to a result of judgement by said
 15 manuscript type judging means.

Brief Description of the Drawings:

Fig. 1 is a schematic view for showing a structure of a conventional image scanner of the third example that is capable of reading both a reflection type manuscript and a
 20 transmission type manuscript;

Fig. 2 is a schematic perspective view for showing outviews of an image scanner according to a first embodiment of the present invention;

Fig. 3 is a schematic view for showing a structure
 25 of the image scanner when a sheet-like manuscript is automatically read by the image scanner according to the first embodiment of the present invention;

Fig. 4 is an explanation view for schematically

0022524.012700

explaining a constitution of a circuit of the image scanner according to the first embodiment of the present invention;

Fig. 5 is a schematic block diagram for showing a constitution of a scanner control section in an image scanner according to the first embodiment of the present invention;

Fig. 6 is a flow chart for showing a control when a reflection type manuscript is read by an image scanner according to the first embodiment of the present invention;

Fig. 7 is a flow chart for showing a control when a transmission type manuscript is read by an image scanner according to the first embodiment of the present invention;

Fig. 8 is a flow chart for showing a control when only a manuscript reading section is used to read a manuscript in an image scanner according to the first embodiment of the present invention; and

Fig. 9 is a flow chart for showing a judgement whether the manuscript is such a type as read by the use of a reflection light or such an another type as read by the use of a transmission light in an image scanner according to a second embodiment of the present invention.

Detailed Description of the Preferred Embodiments:

Referring to Fig. 1, description is, at first made about a conventional image scanner in order to facilitate an understanding of the present invention. Fig. 1 is a schematic view for showing a structure of the conventional image scanner of the third example exemplified in the examined Japanese Patent Publication Hei5-76222, namely 76222/1993 which is mentioned in the preamble of the instant

09492521.012700

specification and which is capable of reading both a reflection type manuscript and a transmission type manuscript.

As illustrated in Fig. 1, the image scanner comprises a base unit 71, an automatic paper feeding unit 72 located on the base unit 71 at the left-hand side of Fig. 1. At the right-hand side of Fig. 1, a transmission unit 73 serving also as a manuscript cover is located on the base unit 71 through a platen glass 74. In the example being illustrated, a manuscript 75, which is either reflection type or transmission type, is set on to be sandwiched between the platen glass 74 and the transmission unit 73.

Inside of the base unit 71 of this image scanner, a sensor unit 78 is located to freely move back and forth in the sub-scanning direction 77. A first lamp 79 for reading image information by the use of a reflected light of the manuscript 75, first and second mirrors 81, 82 for one by one reflecting a light beam progressed in the perpendicular direction from the platen glass 74, and a line sensor 83 for reading image information by receiving light beam reflected by the second mirror 82 are located in the sensor unit 78. On the other hand, inside of the transmission unit 73, a second lamp 84 is located to be movable in the sub-scanning direction 77.

With the structure, the conventional image scanner puts the first lamp 79 off and the second lamp 84 on, when the manuscript 75 is a transmission type one. With this condition being kept, the manuscript 75 is subjected to sub-scanning by moving the sensor unit 78 in the right-hand direction of Fig. 1 at a uniform speed. In addition, a light

002270-012700

beam emitted from the second lamp 84 are received by the first mirror 81 through the manuscript 75 by moving the second lamp 84 similarly in the sub-scanning direction 77. Since the line sensor 83 is incorporated in the sensor unit 78, reading of image information is achieved only by moving such two components simply in the sub-scanning direction 77.

On the other hand, the conventional image scanner puts the first lamp 79 on and the second lamp 84 off, when the manuscript 75 is a reflection type one. With this condition being kept, the sensor unit 78 is moved in the sub-scanning direction 77 at a uniform speed. In this case, it is not necessary to move the second lamp 84.

In the conventional image scanner illustrated in Fig. 1, since the line sensor 83 is located in the sensor unit 78, a length of light path is constant in the unit. However, the sensor unit 78 inevitably becomes large in size to acquire the length of light path. As a result, a driving system for driving such a large sensor unit 78 is required to be strong or large. Furthermore, also the image scanner itself inevitably becomes large in size, when the sensor unit 78 has such a large size.

Referring now to Figs. 2 through 8, description will proceed to an image scanner according to a first embodiment of the present invention. Fig. 2 is a schematic perspective view for showing outviews of the image scanner according to the first embodiment of the present invention.

As illustrated in Fig. 2, the image scanner 101 comprises a manuscript conveying unit 102 having a paper feeding tray 102A for conveying manuscripts one by one, and a

00492321.012700

5
10
15
20

25

within the manuscript conveying unit 102, a first glass plate 112 of a slender shape is located perpendicular to the sheet of Fig. 3. A first light source 114 is located directly under the first glass plate 112. This first light source 114 is such a light source having a cylindrical shape like a fluorescent lamp that is located perpendicular to the sheet of Fig. 3. The first light source 114 is used when the sheet-like manuscript 111 is read by transmitting light through the manuscript 111.

A couple of conveying rolls 115, 116 are located on both sides of the first glass plate 112 and the first light source 114 with the first glass plate 112 and the first light source 114 sandwiched between the conveying rolls 115 and 116. A surface of a roll of each conveying roll 115, 116 is, respectively, projecting upward a little from two opening portions formed on an upper surface of the manuscript conveying unit 102. The surface of a roll of each conveying roll 115, 116 is, respectively, rolling-contact with a lower surface of the sheet-like manuscript 111. The conveying rolls 115 and 116 are driven by a motor (not shown) within the manuscript conveying unit 102, respectively. The conveying rolls 115 and 116 are thereby rotated clockwise, respectively, to force the manuscript 111 to be conveyed in the sub-scanning direction 118 at a uniform speed. At the substantially same position where the conveying roll 115 is kept in contact with the manuscript 111, a manuscript sensor 119 is located to detect a head of the manuscript 111. The manuscript sensor 119 can be constructed from a microswitch. Alternatively, the manuscript sensor 119 can be such a sensor as optically

00492531.042700

detecting the manuscript 111 by coupling a light-emitting element and a light-receiving element. The manuscript sensor 119 is used to detect the manuscript 111 to start reading of image information, when the manuscript 111 is inserted into a position just above the conveying roll 115 by a user (an operator) of the image scanner, or the manuscript 111 is sent from a paper feeding tray of the image scanner to the position. The manuscript reading unit 103 is located in upper a half portion of the image scanner with respect to a boundary of a sheet-like manuscript 111. The manuscript reading unit 103 is adjusted to be fixed to a predetermined position on the manuscript conveying unit 102 on a condition that the manuscript reading unit 103 is positioned in the predetermined position by a positioning mechanism (not shown). With this fixed condition, a second glass plate 121 of a slender shape located on a central of the bottom of the manuscript reading unit 103 is adjusted to be opposite to the first glass plate 112. The first glass plate 112 is constructed from a semi-transparent glass plate, such as frosted glass that causes diffused reflection of a light beam. On the other hand, the second glass plate 121 is constructed from a transparent glass plate. The second glass plate 121 has also a slender shape and is located perpendicular to the sheet of Fig. 3. Besides, the first and the second glass plate 112, 121 are sliding-contact with the manuscript 111 from both sides thereof, respectively. A surface of the manuscript 111 to be read is thereby prevented from floating up or waving, so that reading of image information with high precision is achieved.

00492521.012700

Further, also dust is thereby prevented from invading into the manuscript conveying unit 102 and the manuscript reading unit 103.

A rotation detecting roll 122, which is driven by
 5 the conveying roll 115, is located just adjacent and in parallel to the second glass plate 121 in the manuscript reading unit 103. The rotation detecting roll 122 is a roll for detecting movement of the manuscript 111 in the sub-scanning direction 118 by rotating relatively to the manuscript 111. The
 10 rotation detecting roll 122 transmits its rotation to a gear mechanism (not shown). The movement of the manuscript 111 is thereafter detected by an encoder which will be described later.

In this embodiment, the conveying roll 116 is
 15 provided in addition to the conveying roll 115, so that conveyance of the manuscript 111 may be carried out as smooth as possible, and so that an end of the manuscript 111 for which reading has been finished may be surely released from the manuscript reading unit 103. In a side of the
 20 manuscript reading unit 103, any pinch rolls are not provided opposite to the conveying roll 116. Of course, if such a pinch roll is located, the pinch roll is effective to stable conveyance of the manuscript 111. Therefore, this is not prohibited. A couple of rolls located opposite to each other conveys the
 25 manuscript 111 with having a comparatively wide nip region (a region where two rolls are rolling-contact with each other). This is effective to prevent the manuscript 111 from inclining.

Slightly above the second glass plate 121, a second

00492531.012700

light source 124 is located in parallel to the first light source 114.

The second light source 124 is such a light source that is used for reading the manuscript 111 by the use of a reflected light.

- 5 The second light source 124 is located near the second glass plate 121 in order that loss of light may be minimized. Therefore, it is effective that a reflection mirror to restrict emitting direction of light beam is located around the circumference of the second light source 124, although the
- 10 reflection mirror is not shown. The first light source 114 is similarly located near the first glass plate 112. This enables an efficient use of amount of light and makes the light source be small in size. It is also effective that such a reflection mirror is provided around the circumference of the first light
- 15 source 114.

- In one case, a light beam emitted from the second light source 124 and reflected by a read surface of the manuscript 111 is incident to the first mirror 126 located above the second glass plate 121. In another case, similarly,
- 20 a light beam emitted from the first light source 114 and transmitting through the read surface of the manuscript 111 is incident to the first mirror 126 located above the second glass plate 121. In both cases, the light beam is then reflected by the second mirror 127 located above the rotation detecting roll
- 25 122. Thereafter, the light beam is incident to the third mirror 128 located opposite to the second mirror 127 to be reflected by the third mirror 128. The light beam reflected by the third mirror 128 is again reflected by the second mirror

127. The light beam again reflected by the second mirror 127 is incident to a lens 129 located just under the third mirror 128. Through the lens 129, the light beam incident to the lens 129 forms an image on one-dimensional CCD 131 located just adjacent to the lens 129.

As mentioned above, the first through the third mirrors 126 through 128 are provided in the manuscript reading unit 103. The light beam is reflected by these first through third mirrors 126 through 128 one by one to be incident to the lens 129. With the structure, an optical length from the read surface of the manuscript 111 to the lens 129 is adjusted to be larger, compared with another optical length from the lens 129 to the one-dimensional CCD 131. Consequently, a length of the main-scanning direction as a reading direction of the one-dimensional CCD 131 can be adjusted to be smaller, compared with that of the manuscript 111. Further, depth of photo object is reserved, so that, for example, an image in opened pages at both sides of a manuscript like a book is read well.

Fig. 4 is a schematic view for showing a constitution of a circuit of the image scanner according to the first embodiment. In Fig.4, similarly to that in Fig.3, a constitution of a circuit of the manuscript conveying unit 102 is shown in a lower half portion with respect to the manuscript 111 while a constitution of a circuit of the manuscript reading unit 103 is shown in an upper half portion with respect thereto.

In the manuscript conveying unit 102, as

illustrated in Fig.3, the first light source 114, the manuscript sensor 119, and a motor 141 for driving a couple of conveying rolls 115, 116 shown in Fig.3 are located as electric components. These first light source 114, the manuscript sensor 119, and the motor 141 are connected to a connector 106 of a side of the conveying unit. The motor 141 drives a couple of the conveying rolls 115, 116 through a driving belt (not shown).

On the other hand, in the manuscript reading unit 103, a scanner controlling section 151 is located to control the manuscript conveying unit 102 as well as the manuscript reading unit 103. The scanner controlling section 151 is connected to the one-dimensional CCD 131 through an Analog to Digital Converter (ADC) 152. In addition, the scanner controlling section 151 is connected to the second light source 124, an encoder 154, and a connector 107 of a side of the reading unit. The encoder 154 is composed of a plurality stages of gears for enlarging a rotation angle of the rotation detecting roll 122 illustrated in Fig.3, and a optical sensor for detecting On/Off by transmission of light between teeth of the final stage gear. A pulse signal 155 is adjusted to be outputted from the encoder 154 every time the rotation detecting roll 122 rotates a little.

The scanner controlling section 151 carries out processing in the sub-scanning direction 118 of the manuscript 111 based on the pulse signal 155. Namely, the one-dimensional CCD 131 scans the manuscript 111 in the main scanning direction perpendicular to the sub-scanning

0022521.012700

5

15

25

by a power source (not shown). The scanner controlling section 151 is connected with an information processing device (not shown) such as a computer, or the like through a cable 164. Transmission and reception of various signals therebetween
 5 are carried out through the cable 164. The various signals are not only a reading signal outputted from the scanner controlling section 151 by reading the manuscript 111 but also the detection judging signal 163 obtained from the manuscript sensor 119, and light switching signals for controlling
 10 switching of the first and the second light sources 114 and 124, and like other signals.

Fig. 5 is a schematic view for showing a constitution of the scanner controlling section 151. The scanner controlling section 151 comprises a CPU (central
 15 processing unit) 171. The CPU 171 is connected to each section in the image scanner through the bus 172 such as data bus, and the like. Among the sections, a ROM 173 is a Read Only Memory storing a program for various controls of the image scanner while a RAM 174 is a Random Access Memory
 20 for temporarily storing various data used in the program controls of the image scanner. I/O (input and output) circuit 175 is a circuit for sending or receiving signals with various input and output circuits in the image scanner. In this embodiment, the Analog to Digital Converter (ADC) 152, the
 25 encoder 154, a motor driving circuit 176 and a power supply controlling circuit 177 for light sources are connected to the I/O (input and output) circuit 175.

Among them, the motor driving circuit 176 is

00492521.012700

connected to the motor 141 through the connector 107 of a side of the reading unit and the connector 106 of a side of the conveying unit. The motor driving circuit 176 is adjusted to supply the motor 141 with a driving power or a driving pulses for driving the motor 141. The power supply controlling circuit 177 for light sources is not only connected to the first light source 114 to control switching thereof through the connector 107 of a side of the reading unit and the connector 106 of a side of the conveying unit, but also directly connected to the second light source 124 to control switching thereof. The I/O circuit 175 is connected to the manuscript sensor 119 through the connector 107 of a side of the reading unit and the connector 106 of a side of the conveying unit and is adjusted to input the detection judging signal 163 obtained from the manuscript sensor 119.

In addition, an image processing circuit 179 is connected to the bus 172. The image processing circuit 179 is adjusted to output image data per each line, based on the reading signal 158 inputted to the I/O circuit 175 from the one-dimensional CCD 131 through the Analog to Digital Converter (ADC) 152. The outputted image data are sent to the information processing device (not shown) by the cable 164.

Fig.6 is a flow chart for showing a control operation in which the image scanner is connected to the computer (not shown) to carry out reading of image. In the following description, it is assumed that the manuscript reading unit 103 is set on the manuscript conveying unit 102.

00492521.012700

5

10

20

manuscript 111 is conveyed by a distance L from the nip position illustrated in Fig. 3 in which the conveying roll 115 and the rotation detecting roll 122 is rolling-contact with each other to the reading position for reading a manuscript in the substantially central portion of the second glass plate 121 (Yes in S105), and the reading of the manuscript 111 by the reflection light is started at the time of the count up (S106).

The reading of the manuscript 111 is continued from the time when a backward end of the manuscript 111 is detected similarly by the manuscript sensor 119 (Yes in S107) until the time when pulse signals 155 are counted up to the numbers of pulses P (Yes in S108). The second light source 124 is switched OFF (S109) and conveyance of the manuscript 111 is finished (S110) at the time when pulse signals 155 are counted up to the numbers of pulses P. In a case that an image scanner has such a structure as having also a pinch roll above the conveying roll 116, the manuscript 111 is yet sandwiched between the conveying roll 116 and the pinch roll, even at the time. Accordingly, in that case, pulse signals 155 are counted so that the motor 141 may be stopped to be driven after a predetermined time has passed from the time.

Fig. 7 is a flow chart for showing a control operation in a case that the operator indicates reading of the transmission-type manuscript in step S101 of Fig. 6. In this case, the CPU 171 orders the power supply controlling circuit 177 for light sources to switch only the first light source 114 ON (S201). On this condition, the CPU 171 then monitors the timing when the manuscript sensor 119 detects a head of the

manuscript 111 through the I/O circuit 175 (S202).

When the head of the manuscript 111 is detected, the CPU 171 controls the motor driving circuit 176 to start rotation of the motor 141. A couple of the conveying rolls 115, 116 are thereby driven to be rotated (S203). As a result, the manuscript 111 inserted between the conveying roll 115 and the rotation detecting roll 122 is conveyed in the sub-scanning direction 118 at a uniform speed. Pulse signals 155 are counted up to the numbers of pulses P corresponding to the time from the time when the conveyance is started until the manuscript 111 is conveyed by a distance L from the nip position illustrated in Fig. 3 in which the conveying roll 115 and the rotation detecting roll 122 is rolling-contact with each other to the reading position for reading a manuscript in the substantially central portion of the second glass plate 121 (Yes in S204), and the reading of the manuscript 111 by the transmission light is started at the time of the count up (S205).

The reading of the manuscript 111 is continued from the time when a backward end of the manuscript 111 is detected similarly by the manuscript sensor 119 (Yes in S206) until the time when pulse signals 155 are counted up to the numbers of pulses P (Yes in S207). At that time, the first light source 114 is switched OFF (S208) and conveyance of the manuscript 111 is finished (S209) at the time when pulse signals 155 are counted up to the numbers of pulses P. In a case that an image scanner has such a structure as having also a pinch roll above the conveying roll 116, the manuscript 111

00492531.012700

is yet sandwiched between the conveying roll 116 and the pinch roll, even at the time. Accordingly, in that case, pulse signals 155 are counted so that the motor 141 may be stopped to be driven after a predetermined time has passed from the time.

Fig. 8 is a flow chart for showing a control operation in a case that only the manuscript reading unit 103 is singly used to read the manuscript 111. In this case, the manuscript 111 to be read is a reflection-type one except for specific cases. One of the specific cases is, for example, a manual scan is carried out to read an image on the manuscript 111 which is irradiated with backlight by the use of a certain device. When the operator carries out reading of the manuscript 111 using only the manuscript reading unit 103, he is required to indicate so in the above-mentioned computer. Namely, after a manuscript reading position of the manuscript reading unit 103 is adjusted to the end of the manuscript 111, the operator clicks a start button in a display of the computer (not shown) by a mouse, or pushes an enter key on a keyboard (not shown). Alternatively, a button for starting the reading of image may be provided on the manuscript reading unit 103 itself, and the operator may push the button when preparation therefor is finished.

When the start button (enter key) is pushed (Yes in S301), the CPU 171 renders the second light source 124 ON (S302). Thereafter, it is counted by a counter consisting of a software whether or not numbers of pulse signals 155 outputted from the encoder 154 illustrated in Fig.4 become

00492531-012700

equal to a predetermined numbers N (S303). The predetermined numbers (counted value) N is determined to be numbers of the pulse signals 155 outputted from the encoder 154 during movement of the image scanner per one line in the sub-scanning direction 118. As a result, when a resolution in the sub-scanning direction 118 is determined to be high by the operator, the counted value N becomes smaller in response thereto.

When the counted value N is counted by the counter consisting of a software (Yes in S303), the CPU 171 captures a reading signal 157 that has already been read by the one-dimensional CCD 131 or another reading signal 158 that has been digitized outputted from Analog to Digital converter 152 at that time to produce a reading signal of one line. The reading signal of one line is then sent to the information processing device of the following stage (a computer in this embodiment) by the cable 164. Accordingly, image information of one line has been read. Thereafter, the counter consisting of software is reset (S305). The CPU 171 waits for input of a result of reading of next line.

Besides, if the operator pushes the stop button of the computer before N numbers of the pulse signals 155 are outputted from the encoder 154 (S306), the second light source 124 is switched OFF at that time (S307). Accordingly, reading of the manuscript 111 will be finished at the time (END).

In the control illustrated in Fig. 8, start and end of reading of the manuscript is controlled by operating the start

00492521.012700

button (enter key) or the stop button of the computer. Start and end of reading of the image data may be controlled by monitoring the pulse signals 155 outputted from the encoder 154 illustrated in Fig.4. Namely, when the operator touches
5 the manuscript reading unit 103 to the manuscript or a place having an image to be read and starts the movement thereof, the pulse signal 155 is started to be outputted. Therefore, capturing of image is started from that time. The capturing of image may be stopped when the movement of the manuscript reading unit 103 is stopped. Similarly, when the manuscript
10 reading unit 103 is lifted up and so a predetermined time has passed after the pulse signal 155 is stopped, the capturing of image may be stopped. A region of image obtained as the result of that often becomes larger than a region to be read actually. However, it is readily possible for the operator to
15 make the captured image be displayed in the computer to cut out the required region. Further, a scope of image to be read is determined, dependent on operating condition of the manuscript reading unit 103, thus mentioned. Accordingly,
20 an input operation of image can be simplified.

Besides, as regards the reading operation of the manuscript 111 in step S106 of Fig.6 and step S205 of Fig.7, reading signals can be made by the use of the result of reading by the one-dimensional CCD 131 at constant time intervals,
25 provided that a precision of conveyance of the manuscript 111 is sufficiently high in the sub-scanning direction by a couple of conveying rolls 115, 116. However, since the image scanner according to this embodiment has the encoder 154, it is enough

002207221.012700

to count numbers of the pulse signals 155 similarly to the description with reference to Fig.8 and output image information per one line every time the numbers of the pulse signals 155 become a predetermined numbers. As a result, a
5 precise reading of image is always achieved.

Fig. 9 is a flow chart for showing a judgement whether the manuscript is such a type as read by the use of a reflection light or such an another type as read by the use of a transmission light in an image scanner according to a second
10 embodiment of the present invention. It is also assumed that the manuscript reading unit 103 is set on the manuscript conveying unit 102 in the image scanner according to the second embodiment similarly to Figs. 6 and 7 in the first embodiment.

15 When a head of the manuscript 111 is inserted between the conveying roll 115 and the rotation detecting roll 122 by an operator, the insertion is detected by the manuscript sensor 119 (Yes in S401). The CPU 171 starts conveyance of the manuscript 111 from this time (S402). In addition,
20 counting of pulse signals 155 outputted from the encoder 154 is started. When the pulse signals 155 are counted up to the numbers of pulses P (Yes in S403), the conveyance of the manuscript 111 is stopped temporarily (S404). "this time" is
25 a time when a position progressed several millimeters from a head of the manuscript 111 exists in the reading position of image information. This is for the purpose of enabling a reliable reading of the head of the manuscript 111 by one-dimensional CCD 131 in view of error in conveyance of the

manuscript 111.

At this reading position where the conveyance of the manuscript is stopped, in many cases, a white margin of the manuscript 111 is positioned. The CPU 171, at first, switches the second light source 124 ON for a short time. Then, the CPU 171 makes a light-receiving level (digital value) of the one-dimensional CCD 131 on this ON condition of the second light source 124 be stored in RAM 174 (Fig.5) as a second level (S405). Next, the CPU 171 switches the first light source 114 ON for a short time similarly, at the time when the second light source 124 is switched OFF. Then, the CPU 171 makes a light-receiving level (digital value) of the one-dimensional CCD 131 on this ON condition of the first light source 114 be stored in RAM 174 (Fig.5) as a first level (S406).

The CPU 171 then compares the stored first and second levels with each other (S407). At this time, since the manuscript 111 is stopping, the first level corresponds to a quantity of transmitting light while the second level corresponds to a quantity of reflected light at the same position. Therefore, for example, like in such a case that the manuscript 111 is a OHP (Over Head Projector) sheet, when the quantity of light in the first level is larger than that in the second level (Yes in S407), the manuscript 111 is judged to be a transmission-type one (S408). Consequently, a reading operation of the manuscript 111 is carried out as depicted in the step S205 and the following steps of Fig.7 (S409). On the other hand, when the quantity of light in the first level is not

0049231.02700

larger than that in the second level (No in S407), the manuscript 111 is judged to be a reflection-type one (S410). Consequently, a reading operation of the manuscript 111 is carried out as depicted in the step S106 and the following steps of Fig.6 (S411).

In the interim, the first and the second levels are simply compared with each other in the step S407 of this second embodiment. However, the first and the second levels may be compared with each other, after multiplying either the first or the second level by a predetermined value. Further, the head of the manuscript 111 is read with a portion of the head of several millimeters being failed to be read in the second embodiment. Therefore, when the reading must be done just from the head of the manuscript 111, the reading of the manuscript 111 may be started after making the conveying roll 115 slightly retreat.

Moreover, in the second embodiment, it is assumed that a head of the manuscript 111 includes a margin where image information of black color, or the like does not exist. This is not applied to all of the manuscripts 111. Accordingly, an operator divides all of the manuscripts 111 into two types thereof. In a type of the manuscripts 111 in which a head of the manuscript 111 includes a margin where image information of black color, or the like does not exist, such an automatic judgement and reading of the manuscripts 111 in this embodiment may be applied. On the other hand, in a type of the manuscripts 111 in which a head of the manuscript 111 includes dirt or recorded information, the

operator may manually judge the manuscript 111 whether it is a reflection-type one or a transmission-type one.

Of course, it is possible that respective quantity of light of transmission light and reflection light are compared with each other in a plurality of portions of the manuscript 111 so as to judge the type of the manuscript more reliably. When a plurality of portions of the manuscript 111 are checked, there are two methods. One method is to the same manuscript 111 is read twice with the first time being carried out as a pre-scan. Another method is to make the manuscript 111 back up to the reading start position and thereafter the reading of the manuscript 111 is started. In the present invention, both the methods can be effectively carried out.

While this invention has thus far been described in
15 conjunction with two embodiments thereof, it will now be
readily possible for one skilled in the art to put this invention
into effect in various other manners. For example, CCD is used
as one-dimensional image sensor. However, LED(Light
Emitting Diode) array may be used in one of or both first and
20 second light sources. In this case, a reading unit can be
small in size by using such a device in which LED array, lens
array, and light-receiving element are integrated.

What is claimed is:

1. An image scanner for use in reading image information, comprising:

conveying means for conveying a manuscript including said image information to be read on a predetermined reading position of a conveying route;

a first light source which is located at one side of said conveying route and which emits light onto said predetermined reading position from said one side;

a second light source which is located at another side of said conveying route with being opposite to said first light source and which emits light onto said predetermined reading position from said another side opposite to said one side;

image information reading means for reading said image information included in said manuscript at said predetermined reading position on said conveying route by light-electricity conversion; and

light source switching control means for controlling light source switching between said first and said second light sources to read said image information included in said manuscript, said light source switching control means rendering only said first light source ON when said image information is defined by a transmitting light transmitting through said manuscript, said light source switching control means rendering only said second light source ON when said image information is defined by a reflected light reflected by

002107252460

said manuscript.

2. An image scanner for use in reading image information, comprising:

a driving side conveying roll for conveying a manuscript including said image information to be read;

5 a driven side conveying roll which is located above said driving side conveying roll and which rotates by rolling-contact with said driving side conveying roll;

a manuscript sensor for detecting said manuscript when a head of said manuscript arrives at a position near the
10 rolling-contact position between said driving side conveying roll and said driven side conveying roll;

conveying roll driving means for starting a rotation of said driving side conveying roll when said manuscript sensor has detected an arrival of said head of said manuscript;

15 light-electricity conversion means for carrying out light-electricity conversion of said image information per one line in a main-scanning direction of said manuscript from a side of one surface of said manuscript at a reading position on a conveying route when said driving side conveying roll is
20 started to rotate by said conveying roll driving means and said manuscript is thereby started to move toward the sub-scanning direction between said driving side and said driven side conveying rolls, said reading position existing downstream of said conveying route from the rolling-contact
25 position by a predetermined distance;

a first light source for emitting light onto said reading

00492521-012700

position from a side of another surface of said manuscript opposite to said one surface thereof;

a second light source for emitting light onto said reading
30 position from a side of the same surface of said manuscript as said one surface thereof; and

light source switching control means for selectively rendering either said first light source or said second light source ON to read said image information included in said
35 manuscript, dependent on whether said image information is defined by a reflected light reflected by said manuscript or by a transmitting light transmitting through said manuscript.

3. An image scanner as claimed in claim 2, further comprising an upper housing unit in which said driven side conveying roll, said second light source, and said light-electricity conversion means are contained, and a lower
5 housing unit in which said driving side conveying roll and said first light source are contained, said upper housing unit being separated from said lower housing unit, wherein said upper housing unit is capable of reading image information independently.

10

4. An image scanner as claimed in claim 3, wherein a lower electric component included in said lower housing unit is controlled by an upper electric component included in said upper housing unit, and wherein said upper and said lower
5 housing units are connected by an attachable and removable connector with each other.

5. An image scanner as claimed in claim 2, further comprising an upper housing unit in which said driven side conveying roll, said second light source, and said light-electricity conversion means are contained, and a plurality of
5 mirrors located between said light-electricity conversion means and said reading position, wherein a light path is turned by each of said a plurality of mirrors therebetween.

6. An image scanner as claimed in claim 2, further comprising an encoder which generates a pulse every time said driven side conveying roll makes a predetermined number of rotations.

5

7. An image scanner as claimed in claim 6, wherein said image scanner carries out reading of said image information per one line of said manuscript in synchronization with said pulse generated by said encoder, said reading of said image
5 information being started from the time when said pulse is generated, said reading of said image information being terminated when a predetermined time has passed after said pulse is stopped.

8. An image scanner for use in reading image information, comprising:

a driving side conveying roll for conveying a manuscript including said image information to be read;

5 a driven side conveying roll which is located above said

00492324.012700

driving side conveying roll and which rotates by rolling-contact with said driving side conveying roll;

a manuscript sensor for detecting said manuscript when a head of said manuscript arrives at a position near the
10 rolling-contact position between said driving side conveying roll and said driven side conveying roll;

conveying roll driving means for starting a rotation of said driving side conveying roll when said manuscript sensor has detected an arrival of said head of said manuscript;

15 light-electricity conversion means for carrying out light-electricity conversion of said image information per one line in a main-scanning direction of said manuscript from a side of one surface of said manuscript at a reading position on a conveying route when said driving side conveying roll is
20 started to rotate by said conveying roll driving means and said manuscript is thereby started to move toward the sub-scanning direction between said driving side and said driven side conveying rolls, said reading position existing downstream of said conveying route from the rolling-contact
25 position by a predetermined distance;

a first light source for emitting light onto said reading position from a side of another surface of said manuscript opposite to said one surface thereof;

a second light source for emitting light onto said reading
30 position from a side of the same surface of said manuscript as said one surface thereof; and

light source selection input means for inputting whether either said first light source or said second light source should

00220 T252460

be selected, dependent on whether said image information is
35 defined by a reflected light reflected by said manuscript or by
a transmitting light transmitting through said manuscript,
and

light source switching control means for selectively
rendering either said first light source or said second light
40 source ON to read said image information included in said
manuscript, responsive to a result of selection by said light
source selection input means.

9. An image scanner as claimed in claim 8, further
comprising an upper housing unit in which said driven side
conveying roll, said second light source, and said light-
electricity conversion means are contained, and a lower
5 housing unit in which said driving side conveying roll and said
first light source are contained, said upper housing unit being
separated from said lower housing unit, wherein said upper
housing unit is capable of reading image information
independently.

10

10. An image scanner as claimed in claim 9, wherein a lower
electric component included in said lower housing unit is
controlled by an upper electric component included in said
upper housing unit, and wherein said upper and said lower
5 housing units are connected by an attachable and removable
connector with each other.

11. An image scanner as claimed in claim 8, further

00492531-012700

comprising an upper housing unit in which said driven side conveying roll, said second light source, and said light-electricity conversion means are contained, and a plurality of
 5 mirrors located between said light-electricity conversion means and said reading position, wherein a light path is turned by each of said a plurality of mirrors therebetween.

12. An image scanner as claimed in claim 8, further comprising an encoder which generates a pulse every time said driven side conveying roll makes a predetermined number of rotations.

5

13. An image scanner as claimed in claim 12, wherein said image scanner carries out reading of said image information per one line of said manuscript in synchronization with said pulse generated by said encoder, said reading of said image
 5 information being started from the time when said pulse is generated, said reading of said image information being terminated when a predetermined time has passed after said pulse is stopped.

14. An image scanner for use in reading image information, comprising:

a driving side conveying roll for conveying a manuscript including said image information to be read;

5 a driven side conveying roll which is located above said driving side conveying roll and which rotates by rolling-contact with said driving side conveying roll;

a manuscript sensor for detecting said manuscript when
a head of said manuscript arrives at a position near the
10 rolling-contact position between said driving side conveying
roll and said driven side conveying roll;

conveying roll driving means for starting a rotation of
said driving side conveying roll when said manuscript sensor
has detected an arrival of said head of said manuscript;

15 light-electricity conversion means for carrying out
light-electricity conversion of said image information per one
line in a main-scanning direction of said manuscript from a
side of one surface of said manuscript at a reading position on
a conveying route when said driving side conveying roll is
20 started to rotate by said conveying roll driving means and said
manuscript is thereby started to move toward the sub-
scanning direction between said driving side and said driven
side conveying rolls, said reading position existing
downstream of said conveying route from the rolling-contact
25 position by a predetermined distance;

a first light source for emitting light onto said reading
position from a side of another surface of said manuscript
opposite to said one surface thereof;

a second light source for emitting light onto said reading
30 position from a side of the same surface of said manuscript as
said one surface thereof; and

manuscript type judging means which respectively
renders said first and said second light sources exclusively ON
on a condition that said manuscript is existing at said reading
35 position to compare respective signal levels after conversion

00492331.012700

by said light-electricity conversion means, and which thereby judge whether said manuscript is such a type of manuscript as read by a transmitting light transmitting through said manuscript or such an another type of manuscript as read by a reflected light reflected by said manuscript; and

light source switching control means for selectively rendering either said first light source or said second light source ON to read said image information included in said manuscript, responsive to a result of judgement by said manuscript type judging means.

15. An image scanner as claimed in claim 14, further comprising an upper housing unit in which said driven side conveying roll, said second light source, and said light-electricity conversion means are contained, and a lower housing unit in which said driving side conveying roll and said first light source are contained, said upper housing unit being separated from said lower housing unit, wherein said upper housing unit is capable of reading image information independently.

10

16. An image scanner as claimed in claim 15, wherein a lower electric component included in said lower housing unit is controlled by an upper electric component included in said upper housing unit, and wherein said upper and said lower housing units are connected by an attachable and removable connector with each other.

17. An image scanner as claimed in claim 14, further comprising an upper housing unit in which said driven side conveying roll, said second light source, and said light-electricity conversion means are contained, and a plurality of
5 mirrors located between said light-electricity conversion means and said reading position, wherein a light path is turned by each of said a plurality of mirrors therebetween.

18. An image scanner as claimed in claim 14, further comprising an encoder which generates a pulse every time said driven side conveying roll makes a predetermined number of rotations.

5

19. An image scanner as claimed in claim 18, wherein said image scanner carries out reading of said image information per one line of said manuscript in synchronization with said pulse generated by said encoder, said reading of said image
5 information being started from the time when said pulse is generated, said reading of said image information being terminated when a predetermined time has passed after said pulse is stopped.

20. An image scanner as claimed in claim 14, wherein said image scanner, after said manuscript type judging means have judged whether said manuscript is such a type of manuscript as read by a transmitting light transmitting through said
5 manuscript or such an another type of manuscript as read by a reflected light reflected by said manuscript, reversibly moves

the manuscript until a head of the manuscript reaches said reading position and then starts conveying the manuscript in said sub-scanning direction to read the manuscript.

09492221.012700

Abstract of the Disclosure:

The image scanner 101 comprises a manuscript conveying unit
 102 having conveying rolls 115, 116 for conveying a
 manuscript 111 and a first light source 114, and a manuscript
 reading unit 103 mounted on the manuscript conveying unit
 5 102. The manuscript reading unit 103 detects movement of
 the manuscript 111 in the sub-scanning direction 118 by a
 rotation detecting roll 122 driven by the conveying roll 115.
 When the manuscript 111 is a reflection-type one, only a
 second light source 124 is switched ON to read the manuscript
 10 111. When the manuscript 111 is a transmission-type one,
 only the first light source 114 is switched ON to read the
 manuscript 111. The image scanner 101 does not have a fixed
 platen. One-dimensional CCD 131 is fixed. The image
 scanner 101 can therefore be small in size.

00492531.042700

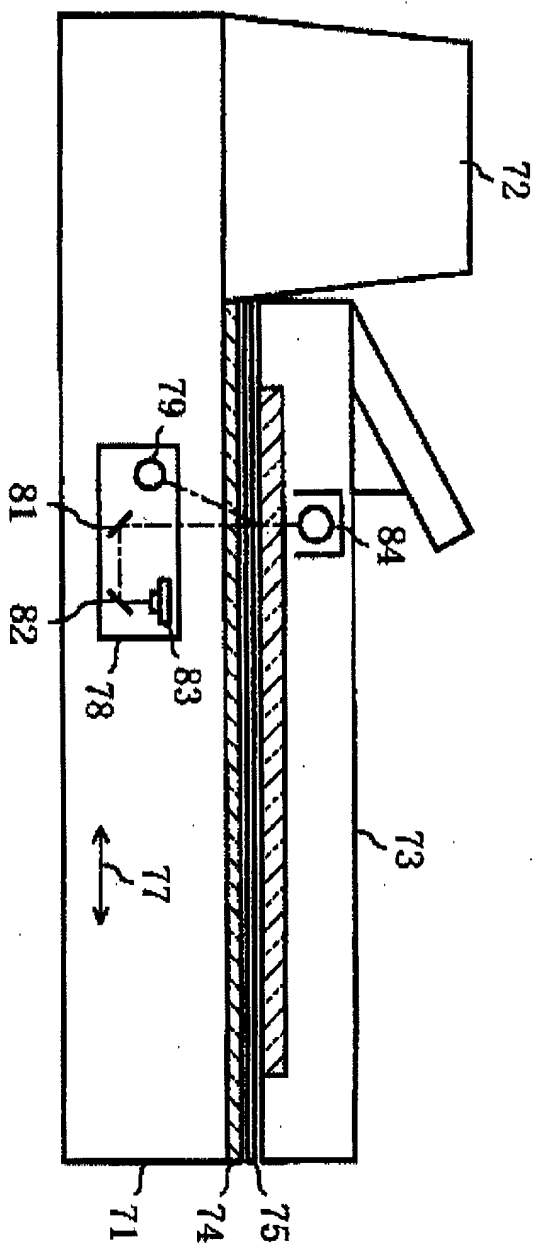


FIG 1

(PRIOR ART)

FIG 2

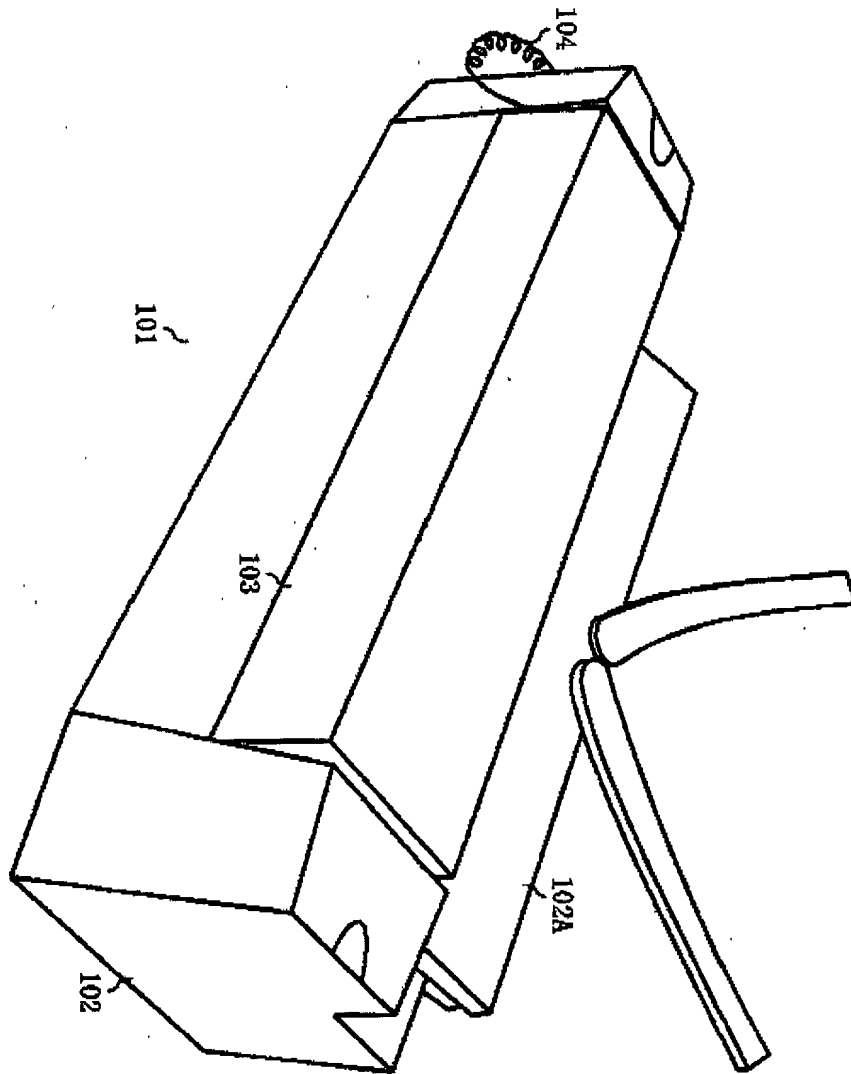


FIG 3



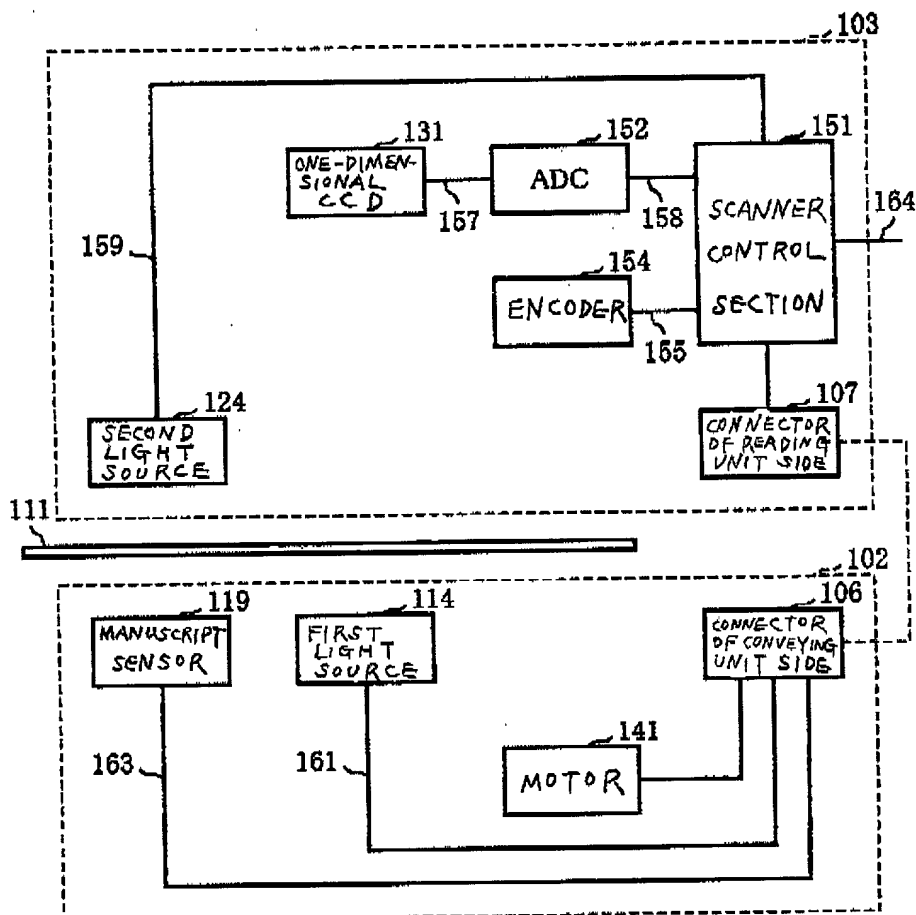


FIG 4


0049221.012700

FIG 6

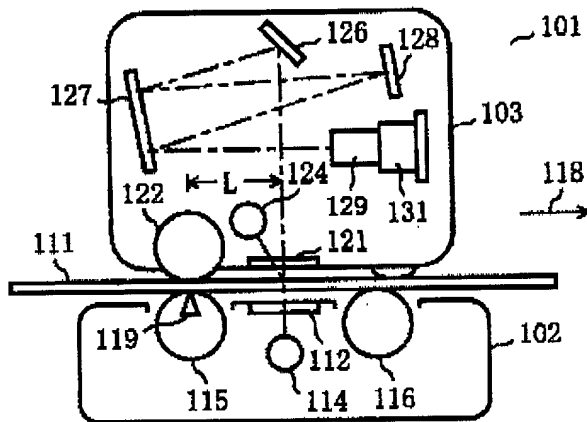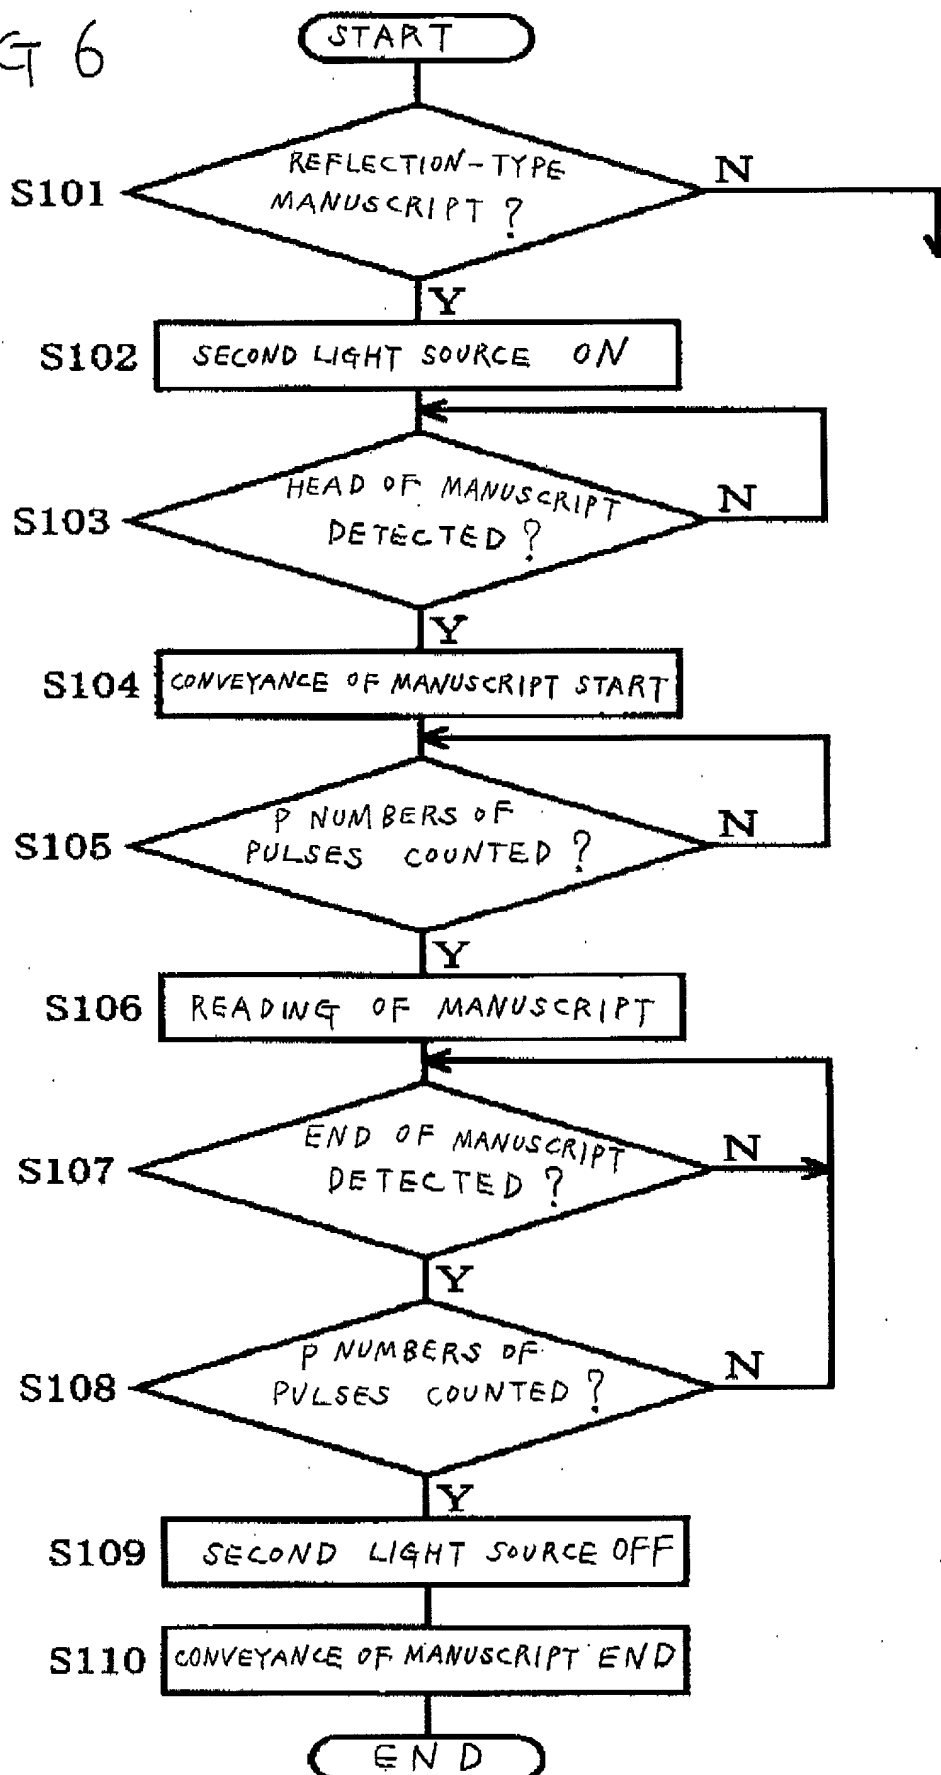

00492521.012700

FIG 7

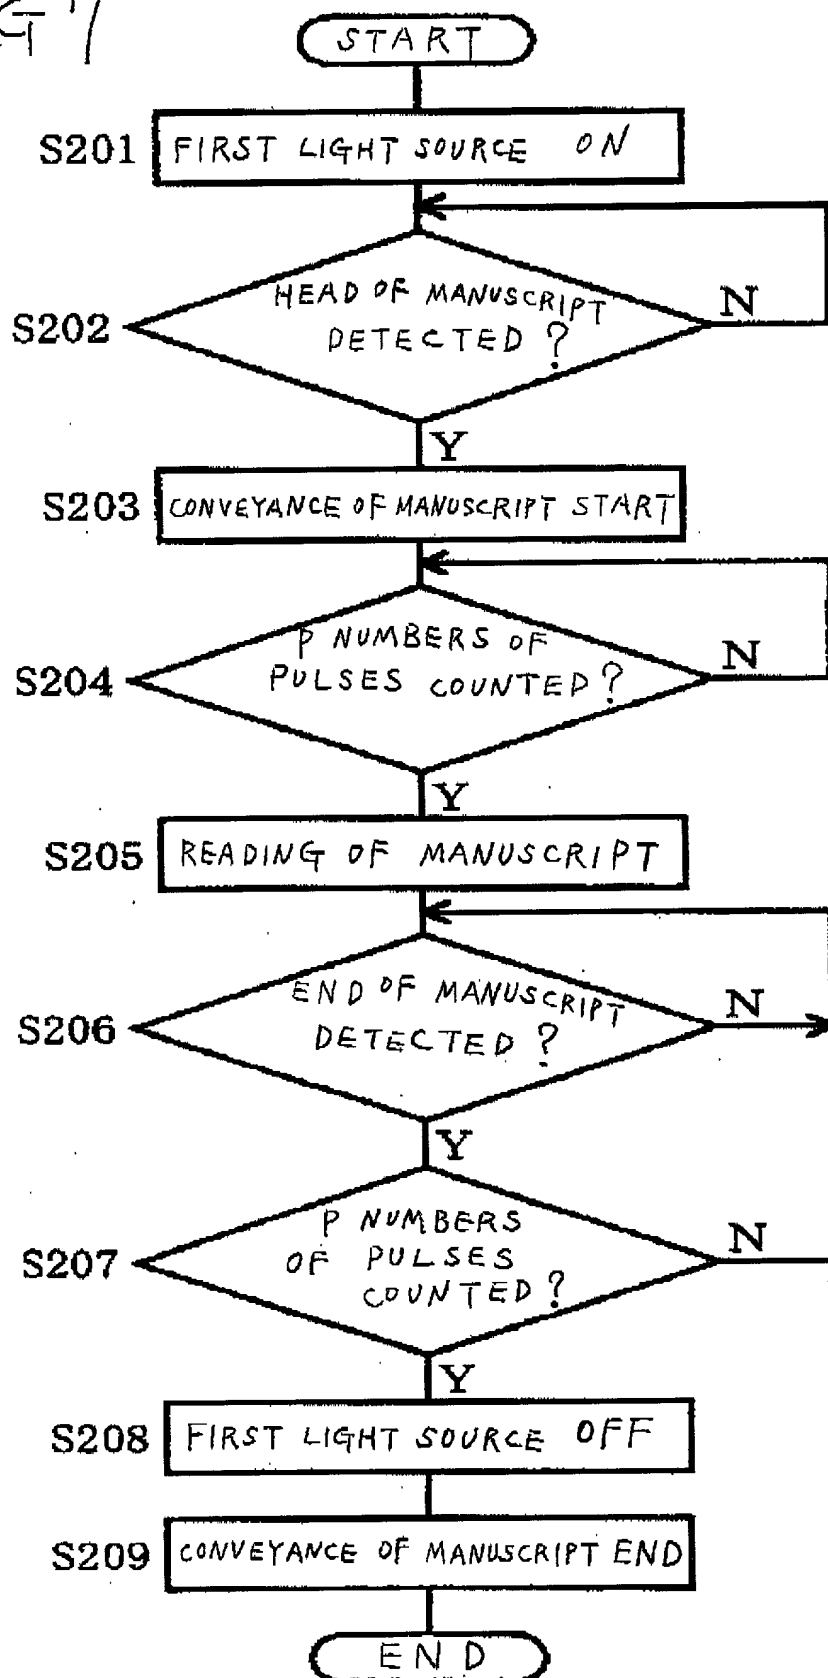

00210-12526460

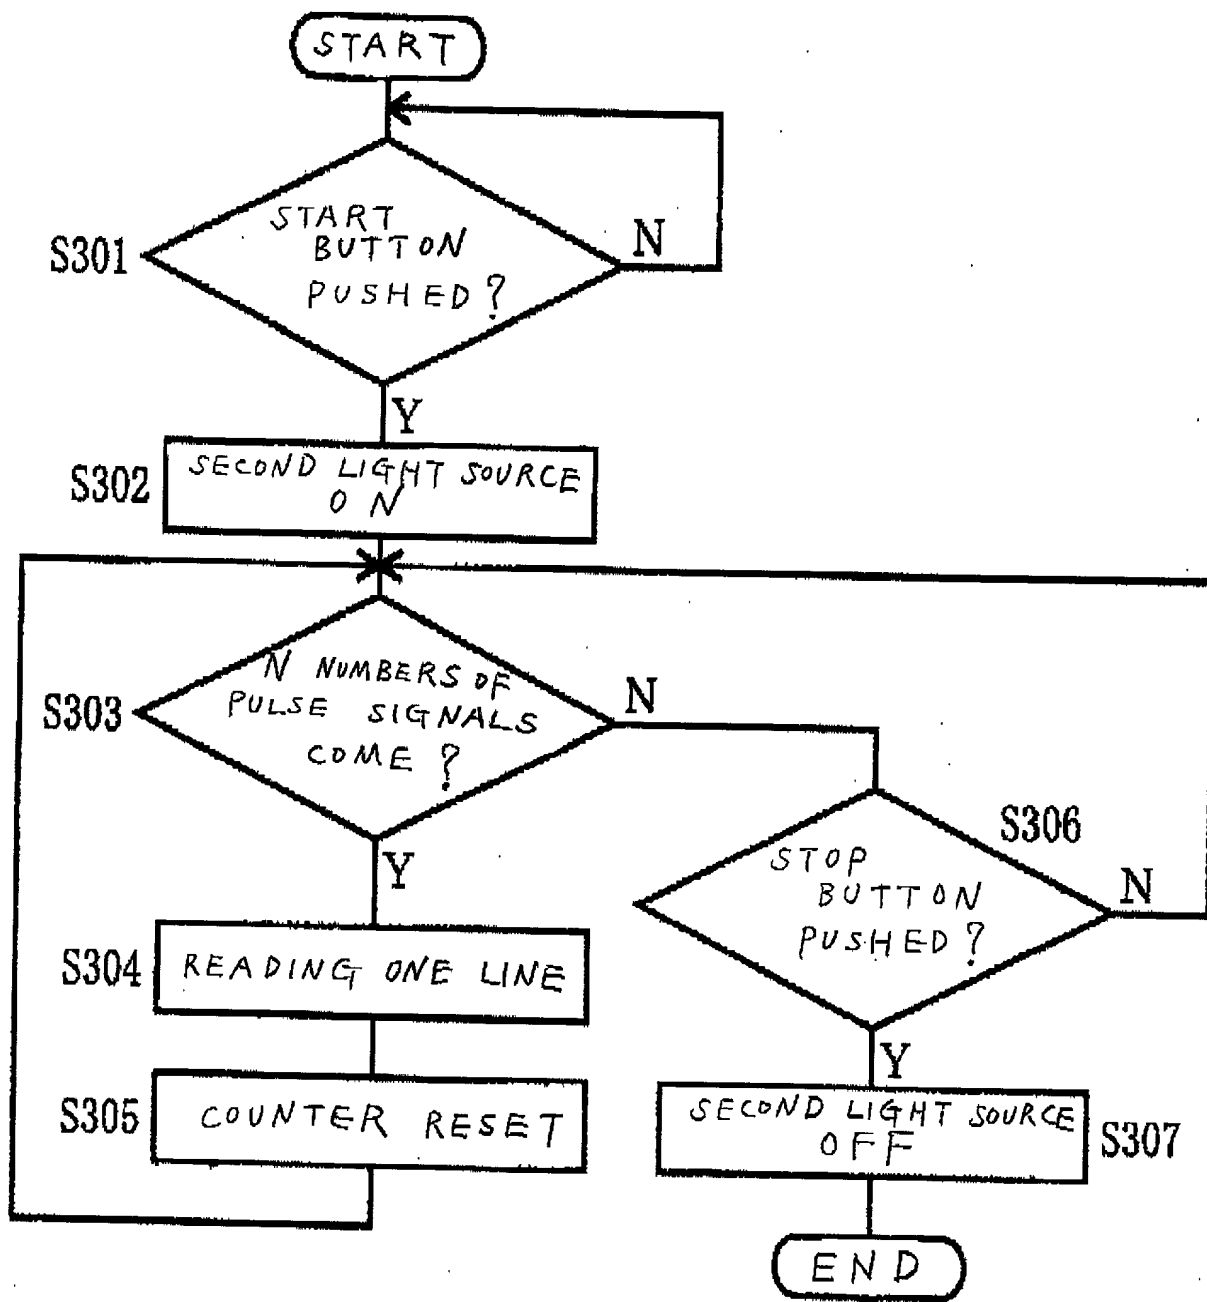


FIG 8

```

graph TD
    START([START]) --> S401{HEAD OF  
MANUSCRIPT  
DETECTED?}
    S401 -- N --> S401
    S401 -- Y --> S402[CONVEYANCE OF  
MANUSCRIPT START]
    S402 --> S403{P NUMBERS  
OF PULSES  
COUNTED?}
    S403 -- N --> S403
    S403 -- Y --> S404[CONVEYANCE OF  
MANUSCRIPT STOP]
    S404 --> S405[SECOND LIGHT SOURCE ON  
AND  
STORE SECOND  
LIGHT-RECEIVING LEVEL]
    S405 --> S406[FIRST LIGHT SOURCE ON  
AND  
STORE FIRST  
LIGHT-RECEIVING LEVEL]
    S406 --> S407{FIRST  
LIGHT-RECEIVING  
LEVEL  
LARGER?}
    S407 -- N --> S410[JUDGE REFLECTION  
-TYPE MANUSCRIPT]
    S407 -- Y --> S408[JUDGE TRANSMISSION  
-TYPE MANUSCRIPT]
    S408 --> S409[READING OPERATION  
OF  
TRANSMISSION-TYPE  
MANUSCRIPT]
    S410 --> S411[READING OPERATION  
OF  
REFLECTION-TYPE  
MANUSCRIPT]
    S409 --> END([END])
    S411 --> END
  
```

FIG 9

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

COMPACT IMAGE SCANNER CAPABLE OF READING BOTH A LIGHT-REFLECTING
ARTICLE AND A LIGHT-TRANSMITTING ARTICLE

the specification of which:
(check one)

X (is attached hereto)
_____ was filed on _____,
as Application Serial No. _____
and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56*

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			priority claimed	
<u>11-015169</u>	<u>Japan</u>	<u>25/01/99</u>	<u>X</u>	
(Number)	(Country)	(Day/Month/Year Filed)	yes	no
<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>
(Number)	(Country)	(Day/Month/Year Filed)	yes	no
<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>
(Number)	(Country)	(Day/Month/Year Filed)	yes	no

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)

Power of Attorney: As a named inventor, I hereby appoint Sean M. McGinn, Reg. No. 34, 386, and Frederick W. Gibb, III, Reg. No. 37,629, as attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

All correspondence should be directed to **McGinn & Gibb, P.C., 1701 Clarendon Boulevard, Suite 100, Arlington, Virginia 22209.**

Telephone calls should be directed to Sean M. McGinn, McGinn & Gibb, P.C. at (703) 294-6699.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole
or First Inventor Hisao Hayashi

Inventor's Signature _____ Date _____

Residence Tokyo, Japan

Citizenship Japanese

Post Office Address c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan

Full Name of Second
Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Third
Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Fourth
Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

(An additional sheet(s) is/are attached hereto if the present invention includes more than four inventors.)

*Title 37, Code of Federal Regulations, § 1.56:

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith toward the Patent and Trademark Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and (1) it establishes by itself or in combination with other information, a prima facie case of unpatentability; or (2) it refutes, or is inconsistent with, a position the applicant takes in: (i) opposing an argument of unpatentability relied on by the Office, or (ii) asserting an argument of patentability.